

Reminder to Check Your Levels

Eaton Fuller Transmission Lubrication Requirements



- CD50 lubricant or equivalent E500 synthetic lubricant per Eaton publication TCMT-0021.
- When adding lubricant, never mix types and brands because they may be incompatible.
- Only use clean lubricant and clean containers when filling the transmission. Never use containers that have been used for antifreeze or water.
- We do not recommend using additives and friction modifiers in Eaton Fuller transmissions.

Recommended Lubricant

TYPE	GRADE (SAE)	TEMP
Roadranger CD50 Transmission Fluid	50	ALL

Includes all Roadranger Approved comparable synthetic lubricant.


Proper Lubricant Level

TRANSMISSION	CAPACITY
9-Speed	28 pints (13.2 liters)
10-Speed	26 pints (12.3 liters)
13/18 Speed	28 pints (13.2 liters)


Note: The quantity for proper fill level will vary from model to model. Please check the owner service manual for proper requirements.

Note: On heavy duty transmissions, one inch of lubricant level equals about 8 pints of oil.

Improper Oil Level

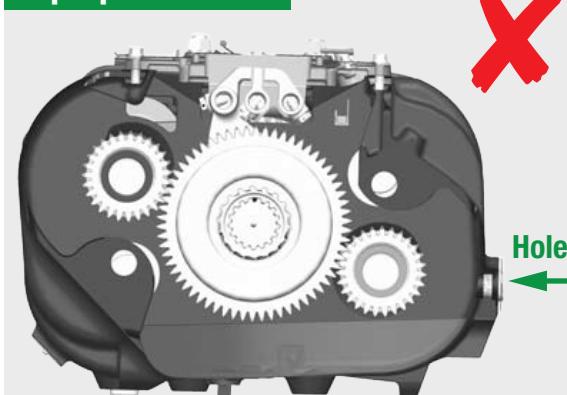

Proper Oil Level

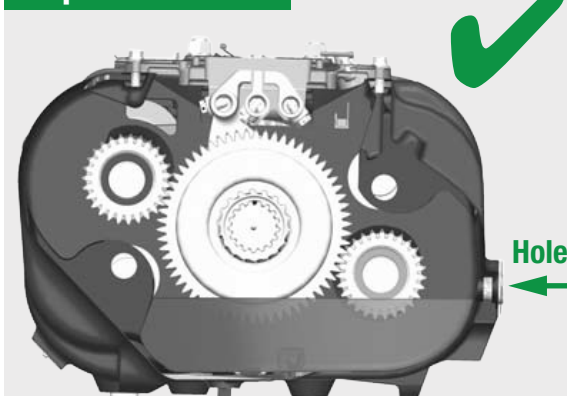

Please make sure the lubricant is level with fill hole opening. Even if you can reach lubricant with your finger does not mean lubricant is at the proper level.

Source: Fuller® Heavy-Duty Transmissions TRIG0070

Edmonton
Alberta
833.442.0442

Mount Pearl
Newfoundland
844.442.0442

Moncton
New Brunswick
844.442.0442

Quebec City
Quebec
844.442.0442

Ottawa
Ontario
613.749.4858

Mississauga
Ontario
833.442.0442

Winnipeg
Manitoba
833.442.0442